

ER 317L

Stainless Steel WIRE/GTAW


Standards

EN/ISO-Standard - 14343-A
EN/ISO-Classification - W 18 15 3 L

AWS-Standard - A5.9
AWS-Classification - ER 317 / 317L

Features and Applications

- Austenitic stainless steel wire used for welding alloys of a similar chemical composition.
- Ideal for severely corrosive environments where crevice and pitting corrosion are of concern.
- Low carbon content reduces the possibilities of intergranular carbide precipitation.
- Not suitable for structural service above 400°C or for cryogenic applications.
- Weld deposit is similar to 316L with high molybdenum content for increased corrosion resistance.
- Typically used in the chemical and petrochemical industries, marine environments, papermaking and food processing industries etc.
- **Test Certificates can be found online @wilkinsonstar247.com**

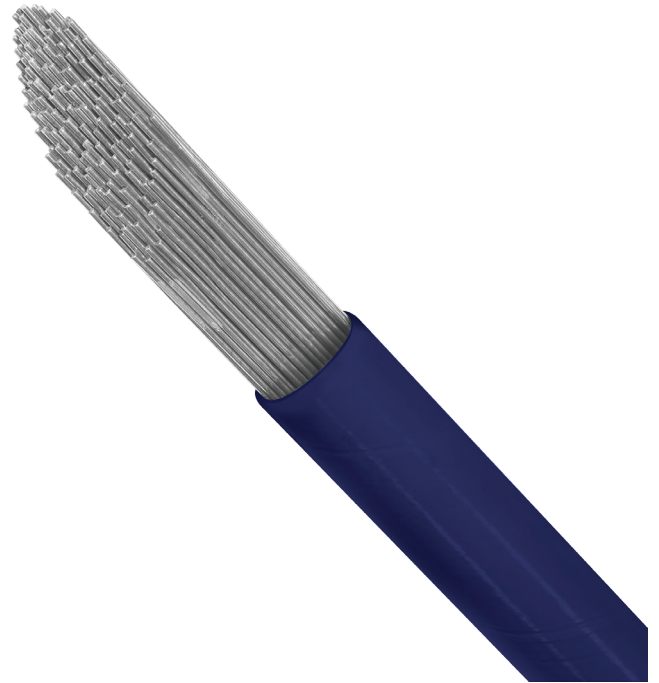

Typical Base Materials

Stainless CrNiMo steels e.g. 317L or similar*
* Illustrative, not exhaustive list

Welding Positions

EN ISO 6947 - PA, PB, PC, PD, PE, PF, PG

Shielding Gases

EN ISO 14175 - TIG: I1 (Argon)

Polarity

DC (-)

Mechanical Properties

Tensile Strength (N/mm ²)	Yield Strength (N/mm ²)	Elongation (%)	Impact Strength (J)
≥480	≥300	≥25	-

Mechanical properties are approximate and may vary based on the heat, shielding gas, welding parameters and other factors.

Chemical Composition % (Typical)

C %	Mn %	Si %	S %	P %	Ni %	Cr %	Mo %	Cu %
<0.03	1.43	0.45	<0.030	<0.030	13.60	18.82	3.55	<0.75

Packaging Data

Part No.	Diameter Ø (mm)	Package Length (mm)	Package Weight (Kg)	Package Type
6011100590	1.60	1000	5	Cardboard Tube
6011100591	2.40	1000	5	Cardboard Tube
6011100592	3.20	1000	5	Cardboard Tube

Liability: Whilst all reasonable efforts have been made to ensure the accuracy of the information contained, this information is subject to change without notice and can be only considered as suitable for general guidance.

