

Superboiler Flange Facing Machine


Range: 65mm - 400mm flange diameter

Functions: stock finish, smooth finish, gramophone finish

Material: any kind of steel

Power: pneumatic or electric (110V or 230 V)

High quality finishes can be achieved with the Superboiler F.
 The cutting feed is automatic from OD inwards.
 Standard stock finishes achieved in steps: 0.2, 0.4, 0.6, 0.8mm

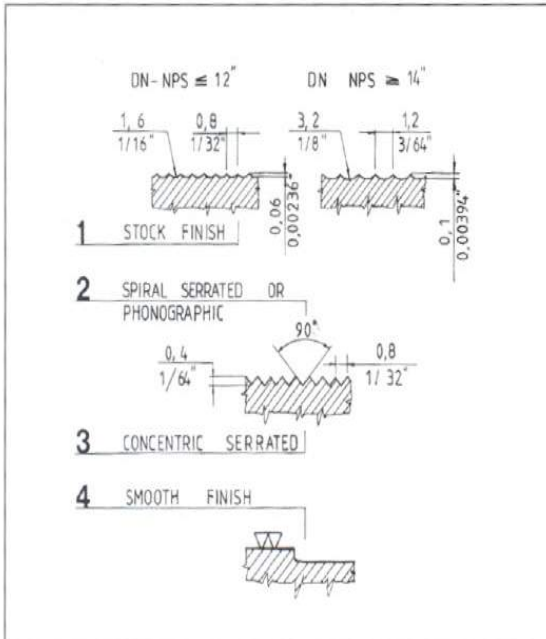

- * Axial feed manually indexed
- * Automatic radial feed: 60mm max stroke
- * I/D locking range: 49 - 203mm
- * Machine locks concentric to the bore of the flange
- * Pneumatic motor: 1.81 Hp
- * Electric motor: 1020 Watt



*Interchangeable endless main
 screw: 0.2 - 0.4 - 0.6 - 0.8 mm.
 (0.0078 - 0.0157 - 0.0236 - 0.0314)*