



Minimise floor space with Key Plant bench Positioners - ideal for welding tubes, pipes and small parts in a compact workshop environment on the go.

VP0.05

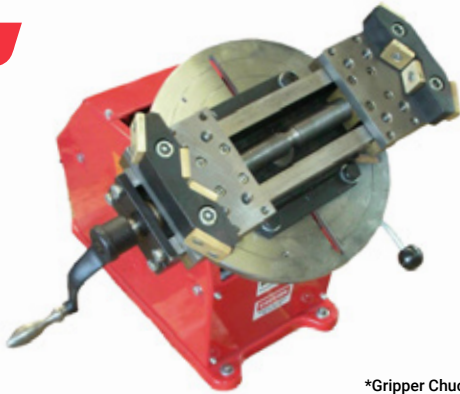

\*Gripper Chuck optional

VP0.15

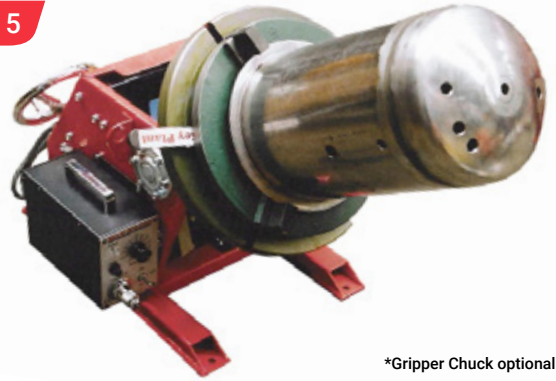

\*Gripper Chuck optional

### 100kg (220lb) Specification

Model	VP0.05
Capacity - Table Vertical	110.2lb (50kg)
Capacity - Table horizontal	220.4lb (100kg)
Centre of Gravity (C of G)	3.9" (100mm)
Eccentricity (ECC)	0.9" (25mm)
Table Diameter	11.8" (300mm)
Table Slots	M10
Overall Table Height	14.7" (375mm)
Overall Height to Trunnions	10.2" (260mm)
Rotation Speed Min	0.3 rpm
Rotation Speed Max	5.00 rpm
Tilt Speed (secs.) 135 deg.	Manual
Tilt Motor	Hand
Earthing	500 amp
Power Supply	110V / 240V
Length	18.8" (480mm)
Width	9" (230mm)
Weight	59.5lb (27kg)

### 250kg (550lb) Specification

Model	VP0.15
Capacity - Table Vertical	330.6lb (150kg)
Capacity - Table horizontal	551.1lb (250kg)
Centre of Gravity (C of G)	5.9" (150mm)
Eccentricity (ECC)	1.9" (50mm)
Table Diameter	13.7" (350mm)
Table Slots	M10
Overall Table Height	15.7" (400mm)
Overall Height to Trunnions	10.6" (270mm)
Rotation Speed Min	0.3 rpm
Rotation Speed Max	5.00 rpm
Tilt Speed (secs.) 135 deg.	Manual
Tilt Motor	Hand
Earthing	500 amp
Power Supply	110V / 240V
Length	18.8" (480mm)
Width	15.7" (400mm)
Weight	110.2lb (50kg)

Key Plant Bench Positioners incorporate a forward/stop/reverse switch speed potentiometer "power on" pilot light and a fuse to protect the circuit from overload conditions.

Each Bench Positioner comes complete with stop/start, heavy-duty remote foot control and 3 metres of cable.

### Optional Equipment



• WPSC Gripper Chuck • WP200 Gripper Chuck • WP300 Gripper Chuck • HP2 Gripper Chuck